

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 September 2005 (01.09.2005)


PCT

(10) International Publication Number
WO 2005/079952 A1

- (51) International Patent Classification⁷: **B01D 46/24** (74) Agent: **AGAZZANI, Giampaolo**; Agazzani & Associati S.r.l., Via Dell'Angelo Custode 11/6, I-40141 Bologna (IT).
- (21) International Application Number: PCT/IB2005/000320 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 9 February 2005 (09.02.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
BO2004A000063 12 February 2004 (12.02.2004) IT
- (71) Applicant (for all designated States except US): **BMC S.R.L.** [IT/IT]; Via Roslè, 115, I-40059 Medicina (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BERGAMI, Gaetano** [IT/IT]; Via Roslè, 1001, I-40059 Medicina (IT).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: LOW RESISTANCE AIR FILTER DEVICE

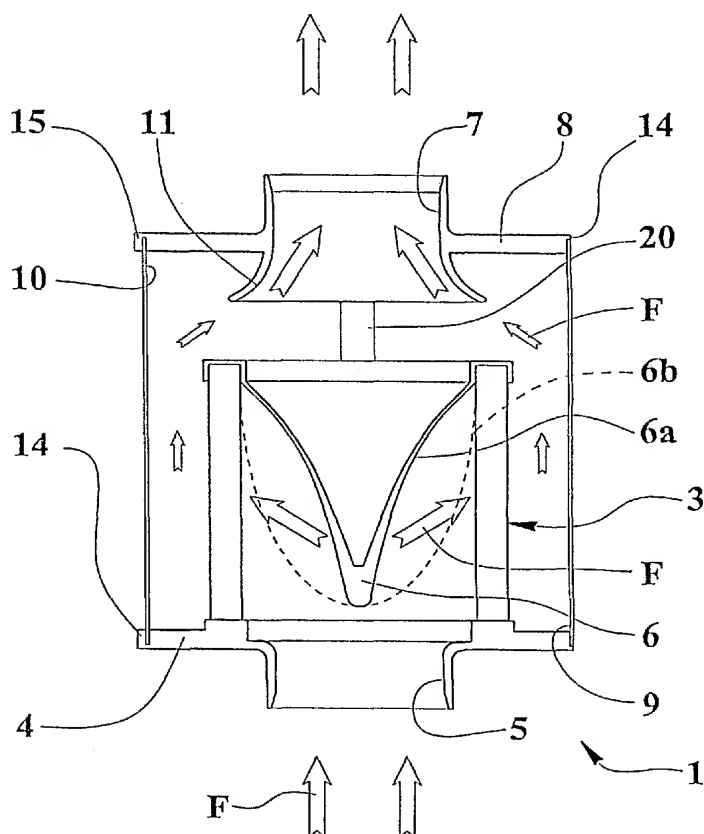

(57) Abstract: A low resistance air filter device comprises a tubular case (2) for at least a filtering element (3) fixed to a lower opening (9) of the case (2). This latter case is provided, at its opposite upper opening (10), of outlet means (8) provided with an outflow opening (7) for the air. The outlet means (8), at the outflow opening (7), are provided of a tubular body protruding toward inside said tubular case (2) and connect in flow communication the inside volume of the tubular case with the outflow opening (7) the same.

WO 2005/079952 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*